

The INVERTER 5 HF benefit of the High Frequency Technology (HF) and a charging curve type IUoU

This on board battery charger was designed especially for vehicles equipped of liquid or gel electrolyte Pb 12V battery.

Compact and very light (0.9 kg). It is ideal to charge and maintain battery charged from 20 to 100 Ah,

exemple : exposition vehicles, spare vehicles or electrical trolleys


It can be used for all marine applications as it will resist salt environment.



Ref. **029170**

ASSETS :




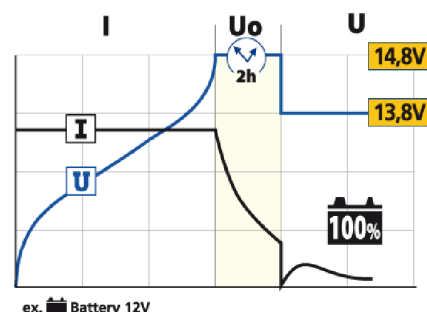


- Charge at 100% each type of lead batteries (liquid or gel)
- Constant, smooth and stable current of charge :
 - Optimum protection of the batteries
 - Charge must faster than the conventional battery
 - Protection of the electronic board
- Automatic charge without supervision
- This product can be connected continuously
- Insensible to main current fluctuations



ex.  Battery 12V

**DESIGNED TO RESIST TO MECHANICAL SHOCKS
DUE TO VIBRATIONS**

CE EN 60335-2-29

 50/60Hz			START mini	BOOST	EQUALIZE /ABSORPTION		FLOATING			
					Gel	Liquid				
230V	80W	12V	1V	5A	-	14,8V	13,8V	10A	20,5x12,5x7 cm	0,9 kg